

## Performance Specifications for

### **Model B140 Balancing Machine** **127000 kg (280000 Pounds) Capacity** **End Drive/Machining Type**

#### 1. **GENERAL DESCRIPTION**


##### 1.1 **Balancing Machine**

1.1.1 The Model B140 is a dynamic, horizontal axis, soft bearing balancing machine. It uses moving coil transducers to measure the motion of an unbalanced rotor on freely moving suspensions. The machine must be firmly mounted to a standard reinforced concrete floor, but does not require any special foundation. In order to provide an easy to use transportable mounting method, track clamps are provided to lock the pedestals and console to an existing railroad track or an optional prefabricated railroad track bed assembly. The Model B140 has an End Drive console with a variable speed motor and multi-speed gearbox for efficient transfer of torque to the rotor. The End Drive system uses a cardan shaft (supplied) to spin the rotor. Adapters to attach the cardan shaft to the rotor are the customers' responsibility. The use of a cardan shaft may require the use of electronic tooling compensation (a feature in the Model 295 instrument) to eliminate errors due to fit-up and/or unbalance in the adapter tooling.

The machine and instrument are easy to set up and use. The standard calibration method uses trial weights to calibrate the rotor to the balancing instrument for the most accurate possible unbalance readout.

##### 1.2 **Instrumentation**

1.2.1 The standard balancing instrument is the Model 295 which has large digital display meters and shaft synchronous digital filters. Dynamic (Left/Right), Static and Couple unbalance can be displayed, individual workpiece setups can be stored and the balance results can be printed on an external printer. The instrument also displays the angle position of the rotor to aid in placing the correction weights on the rotor. Detailed specifications on the 295 instrument are separate from these performance specifications.

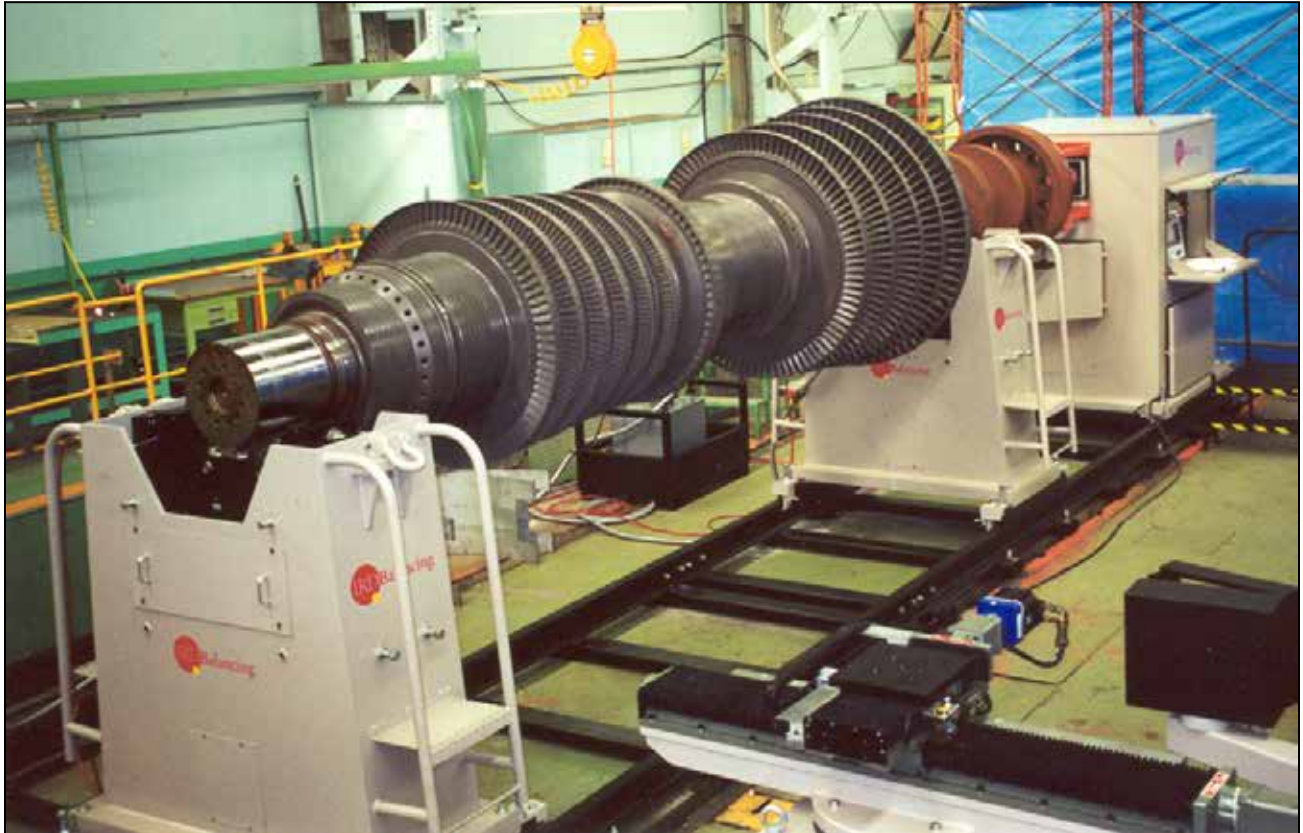

**Figure 1 - B140 Balancing Machine**

## 2. SPECIFICATIONS

### 2.1 **Rotor Mass and Unbalance Limitations**

#### 2.1.1 Maximum weight capacity

2.1.1.1 Standard Roller Bearings (270 mm) 127000 kg (280000 pounds)

#### 2.1.2 Maximum weight per support

2.1.2.1 Standard Roller Bearings (270 mm) 75000 kg (165000 pounds)

2.1.2.2 Capacity Note: *Total rotor weight cannot exceed the maximum capacity of paragraph 2.1.1*

#### 2.1.3 Minimum weight

2.1.3.1 Standard Roller Bearings (270 mm) 450 kg (1000 pounds)

#### 2.1.4 Minimum Achievable Residual

Unbalance ( $U_{mar}$ ) per plane under ideal rotor conditions 0.2 g mm/kg (*but not less than 180 g mm*) (.004 g in/lb) (*7 g in*)

2.1.5 Unbalance Reduction Ratio 95%

### 2.2 **Rotor Dimensions**

2.2.1 Maximum rotor diameter (with Standard Rollers) 3900 mm (154 inches)

2.2.2 Maximum distance between support bearing centerlines Limited Only by Installation Space Available

2.2.3 Minimum distance between support bearing centerlines 915 mm (36 inches)

Journal diameters accommodated on roller bearings (Sets 2 – 4 optional)

2.2.3.1 Set 1 (270 mm diameter) 300 to 800 mm (12 to 32 inches)

2.2.3.2 Set 2 (260 mm diameter) 100 to 500 mm (4 to 20 inches)  
(weight capacity range 230 kg to 36300 kg per pair)

2.2.3.3 Set 3 (200 mm diameter) 60 to 710 mm (2.5 to 28 inches)  
(weight capacity range 230 kg to 22700 kg per pair)

2.2.3.4 Set 4 (160 mm diameter) 180 to 300 mm (7 to 12 inches)  
(weight capacity range 230 kg to 22700 kg per pair)

#### 2.2.4 Rotor Centerline from Floor

2.2.4.1 On 60 mm Journal diameter 1532 mm (60.3 inches)

2.2.4.2 On 800 mm Journal diameter 1955 mm (77 inches)

2.2.5 Maximum Difference in Rotor Journal Diameters with Equal Diameter Rollers 229 mm (9 inches)

2.2.6 Height Adjustment Travel (total) 114 mm (4.5 inches)



2. **SPECIFICATIONS (continued)**

- 2.3.7 Output Torque, Maximum
  - 2.3.7.1 At motor 619 N m (457 pound feet)
  - 2.3.7.2 At Cardan Shaft (Gear #9) 1393 N m (1028 pound feet)
  - 2.3.7.3 At Cardan Shaft (Gear #5) 4737 N m (3494 pound feet)
  - 2.3.7.4 At Cardan Shaft (Gear #1) 17624 N m (12999 pound feet)
- 2.3.8 Acceleration Torque Same as output torque, Section 2.3.7
- 2.3.9 Braking Torque Same as output torque, Section 2.3.7
- 2.3.10 Motor speed, Maximum
  - 2.3.10.1 At motor 1150 RPM
  - 2.3.10.2 At Cardan Shaft (Gear #9) 511 RPM
  - 2.3.10.3 At Cardan Shaft (Gear #5) 150 RPM
  - 2.3.10.4 At Cardan Shaft (Gear #1) 40 RPM (slow roll, machining only)
- 2.3.11 Type of brake Regenerative with supplementary dual air actuated disk brake for rotor holding
- 2.3.12 Motor and Controller To NEMA and AMT standards
- 2.3.13 Controller Speed range 20:1
- 2.3.14 Balancing speed 70 to 511 RPM
- 2.3.15 Slow Roll/Machining Speed 1.9 to 61
- 2.3.16 Gearbox Multi-speed, Heavy Duty Gearbox with 11 speed ranges. Gearbox is located inside control console and is shifted only under no load conditions.

GEAR	MIN. RPM	MAX. RPM
Low Rev	1.9	39
Hi Rev	6.6	131
1	2.0	40
2	3.0	61
3	4.1	82
4	5.6	112
5	7.5	150
6	10.4	208
7	14.0	279
8	19.1	381
9	25.6	511

- 2.3.17 Air Supply Requirement 480 to 690 kPa at 0.85 m<sup>3</sup>/h (70 to 100 psi at 0.5 cfm)

### 3. MACHINE COMPONENTS

#### 3.1 **Machine Bed**

3.1.1 No Machine Bed is required. The pedestals and console attach directly to any existing railroad spur, either flush with the floor or on top of the floor. If railroad track is not available, the pedestals and console can be directly lagged to the concrete floor. An optional Railroad Track Bed Assembly is available that provides the benefit of a railroad spur but with the advantage that it can be transported with the machine and be placed on any concrete floor.

#### 3.2 **Work Supports**

- 3.2.1 Two super critical (above resonance) pedestals with high output moving coil vibration transducers support the rotor to be balanced. The transducer calibration is traceable to National Institute of Standards & Technology (USA). (Transducers are furnished with Balancing Instrument).
- 3.2.2 Both work supports contain a manually adjustable height adjustment mechanism for leveling rotors with unequal diameter journals.
- 3.2.3 Each work support contains a Cradle Assembly that provides gimbaling pivoting action for the precision flat rollers which in turn provide line contact with rotor journals at all times. This method reduces the risk of scoring or high concentrated loads on the rotor journals.
- 3.2.4 Set # 1 - Roller Assembly (Standard) - Two Full Capacity Roller Bearing assemblies with 270 diameter x 290 mm wide flat rollers (10.75 x 11.5 inch) for journal diameters of 300 to 800 mm (12 to 32 inches).
- 3.2.5 Pedestals are bolted to the floor or clamped to railroad track. They must be positioned as required to accommodate various rotor lengths.

#### 3.3 **End Drive Control Console**

- 3.3.1 The control console contains the DC Drive Motor and a Regenerative DC Drive Motor Controller with circuit disconnect switch completely wired ready for operation on the specified AC supply voltage. An input cable from the customer's AC supply voltage source to the console is required. A drive isolation transformer for other voltages is optional.
- 3.3.2 Dual Air Actuated Calipers and Disc for Rotor Holding.
- 3.3.3 Multi-speed gearbox with 11 speeds.
- 3.3.4 An adjustable length Driveshaft is provided to connect the output shaft of the console to the rotor.
- 3.3.5 Operator Controls consisting of START and STOP pushbuttons, JOG/RUN switch, SPEED control knob, Brake OFF-NORM switch with air pressure regulator and gauge, semi-automatic Journal Lubrication control button and rotation selector switch for Clockwise or Counterclockwise Rotation.



3. **MACHINE COMPONENTS (continued)**

- 3.3.6 Ampere Readout 0 to 200 AMPS (0 to 200 C/s) Maximum with 3-Position PHASE Selector switch and Power ON Light
- 3.3.7 End Thrust Readout 0 to 8500 newtons (0 to 2000 pounds).
- 3.3.8 Rotor Angle Indicator on output shaft is graduated in 1° increments with a reference pointer for positioning the rotor.
- 3.3.9 Model 295 Balancing Instrument. (See Section 3.4)
- 3.3.10 Printer for printing Balance Certificates
- 3.3.11 Operator Writing Shelf.

3.4 **Instrumentation - See Section 1.2**

- 3.4.1 Instrument supplied Model 295 Balancing Instrument  
(see separate specification sheet for 295)

3.5 **Accessories (included with Balancing Machine)**

- 3.5.1 (1) Height Adjustment Tool
- 3.5.2 (1) Driveshaft
- 3.5.3 (2) Operation manuals
- 3.5.4 (1) Printer
- 3.5.5 Lubrication fittings for roller assemblies

4. **PAINT**

- 4.1 **Standard color** –Pedestals and Console Warm Gray - Pantone 7C 5

5. **GENERAL ARRANGEMENT**

- 5.1 **Design Details** See Drawing D98340

5.2 **Overall Dimensions**

- 5.2.1 Pedestals
  - 5.2.1.1 Length 1956 mm (77 inches)
  - 5.2.1.2 Width 762 mm (30 inches)
  - 5.2.1.3 Height 1630 mm (64.2 inches)
- 5.2.2 Console
  - 5.2.2.1 Length 1588 mm (62.5 inches)
  - 5.2.2.2 Width 1588 mm (62.5 inches)
  - 5.2.2.3 Height 2235 mm (88 inches)
- 5.2.3 Parts Box
  - 5.2.3.1 Length 1219 mm (48 inches)
  - 5.2.3.2 Width 813 mm (32 inches)
  - 5.2.3.3 Height 660 mm (26 inches)

5. **GENERAL ARRANGEMENT (continued)**

5.3 **Weight**

5.3.1	Pedestals		
5.3.1.1	Pedestal #1	2812 kg	(6200 pounds)
5.3.1.2	Pedestal #2	2812 kg	(6200 pounds)
5.3.2	Console	3456 kg	(7620 pounds)
5.3.3	Parts Box	567 kg	(1250 pounds)
5.3.4	Net Shipping Weight (all items)	9647 kg	(21270 pounds)

5.4 **Export Shipping Crate Dimensions**

5.4.1	Shipping Note:	Machine may be shipped uncrated when using a container.	
5.4.2	Pedestals		
5.4.2.1	Length	2032 mm	(80 inches)
5.4.2.2	Width	914 mm	(36 inches)
5.4.2.3	Height	1778 mm	(70 inches)
5.4.3	Console		
5.4.3.1	Length	1727 mm	(68 inches)
5.4.3.2	Width	1727 mm	(68 inches)
5.4.3.3	Height	2388 mm	(94 inches)
5.4.4	Parts Box		
5.4.4.1	Length	1219 mm	(48 inches)
5.4.4.2	Width	813 mm	(32 inches)
5.4.4.3	Height	660 mm	(26 inches)

5.5 **Export Shipping Weight**

5.5.1	Pedestals		
5.5.1.1	Pedestal #1	2926 kg	(6450 pounds)
5.5.1.2	Pedestal #2	2926 kg	(6450 pounds)
5.5.2	Console	3946 kg	(8700 pounds)
5.5.3	Parts Box	567 kg	(1250 pounds)
5.5.4	Gross Shipping Weight (all items)	10365 kg	(22850 pounds)



## 6 INSTALLATION

- 6.1 Foundation Requirements      A normal reinforced concrete floor is recommended. No special heavy concrete substructure is required as long as the floor is capable of safely supporting the weight of the balancing machine plus its maximum weight capacity and does not permit any pedestal motion during the balancing operation.
- 6.2 Mounting      Pedestals, console and optional railroad track, if used, must be secured to each other and the foundation to prevent movement during balancing.

## 7. OPTIONAL MODIFICATIONS AND ACCESSORIES

- 7.1 Railroad Track Bed Assembly, length - 10000 mm (33 feet)      P/N E33203
- 7.2 Railroad Track Bed Assembly, length - 13400 mm (44 feet)      P/N E29353
- 7.3 Roller Carriage Assembly (Set 2), 230 to 36300 kg (500 to 80000 pounds) capacity per pair with 260 mm diameter x 133 mm wide (10.25 x 5.25 inches) flat rollers and journal diameter range of 100 to 500 mm (4 to 20 inches).      P/N E13415
- 7.4 Roller Carriage Assembly (Set 3), 230 to 22700 kg (500 to 50000 pounds) capacity per pair with 200 mm diameter x 76 mm wide (8 x 3 inches) flat rollers and journal diameter range of 60 to 710 mm (2.5 to 28 inches).      P/N E10666-800
- 7.5 Roller Carriage Assembly (Set 4), 230 to 22700 kg (500 to 50000 pounds) capacity per pair with 160 mm diameter x 76 mm wide (6.25 x 3 inches) flat rollers and journal diameter range of 180 to 300 mm (7 to 12 inches).      P/N E10666-625
- 7.6 Console and Pedestal risers for increased rotor swing diameters up to 6045 mm (238 inches). Standard Riser heights- 150, 300, 450, 610, 910, and 1060 mm (6, 12, 18, 24, 36, and 42 inches)
- 7.7 Custom Paint Color.
- 7.8 Spare Parts Kit. Includes two spare 270 mm (10.75 inches) diameter rollers, one set of suspension bearings for one pedestal and one operation manual.      P/N E43660
- 7.9 Negative Load Hold-Down Assembly rated at 26000 newtons (6000 pounds) capacity for balancing rotors with an outboard center of gravity. For use with 22700 kg (50000 pound) capacity roller work supports.      P/N E26292
- 7.10 Rotor Safety Hold-Down Frame with Counter Roller to constrain rotor from vertical movement during balancing.      P/N E11741

7. **OPTIONAL MODIFICATIONS AND ACCESSORIES (continued)**

- |          |  |                            |
|----------|--|----------------------------|
| 7.11     | Heavy Duty Precision U-Joint Cardan Driveshaft, Fixed Length.  | P/N E34020                 |
| 7.11.1   | Length   | 965 mm (38 inches)         |
| 7.11.2   | Weight   | 39 kg (85 pounds)          |
| 7.11.3   | Maximum Torque   | 8800 N m (6500 pound-feet) |
| 7.11.4   | Angle from Horizontal  |                            |
| 7.11.4.1 | Maximum  | $\pm 12^\circ$             |
| 7.11.4.2 | For stated Umar  | $\pm 3^\circ$              |
| 7.11.5   | Maximum Unbalance Error, (see Section 2.3.2 Notes)   |                            |
| 7.11.5.1 | Systematic   | 1440 g mm (56 g in)        |
|          |  |                            |
| 7.12     | Medium Duty Precision U-Joint Cardan Driveshaft for medium weight rotors, Fixed Length.  | P/N E43673                 |
| 7.12.1   | Length   | 965 mm (38 inches)         |
| 7.12.2   | Weight   | 24 kg (52 pounds)          |
| 7.12.3   | Maximum Torque   | 4949 N m (3650 pound-feet) |
| 7.12.4   | Angle from Horizontal  |                            |
| 7.12.4.1 | Maximum  | $\pm 12^\circ$             |
| 7.12.4.2 | For stated Umar  | $\pm 3^\circ$              |
| 7.12.5   | Maximum Unbalance Error, (see Section 2.3.2 Notes).  |                            |
| 7.12.5.1 | Systematic   | 1440 g mm (56 g in)        |
|          |  |                            |
| 7.13     | Light Duty Precision U-Joint Cardan Driveshaft for lightweight rotors, Fixed Length.   | P/N E35474                 |
| 7.13.1   | Length   | 940 mm (37 inches)         |
| 7.13.2   | Weight   | 20 kg (45 pounds)          |
| 7.13.3   | Maximum Torque   | 3254 N m (2400 pound-feet) |
| 7.13.4   | Angle from Horizontal  |                            |
| 7.13.4.1 | Maximum  | $\pm 12^\circ$             |
| 7.13.4.2 | For stated Umar  | $\pm 3^\circ$              |
| 7.13.5   | Maximum Unbalance Error, (see Section 2.3.2 Notes).  |                            |
| 7.13.5.1 | Systematic   | 1440 g mm (56 g in)        |
|          |  |                            |
| 7.14     | Transformer for voltages other than standard AC supply voltage. The transformer is mounted on a transportable frame with an integral flexible cable that can be wired into the disconnect switch on the control console. The cable between the transformer and the AC source is the customer's responsibility. |                            |

7. **OPTIONAL MODIFICATIONS AND ACCESSORIES (continued)**

7.15 A Drive Isolation Transformer. This is recommend to protect the drive controller from AC line transients caused by other high current draw equipment or by AC power disruptions. This is not required if the transformer from Section 7.14 is used. The transformer is mounted on a transportable frame with an integral flexible cable that can be wired into the disconnect switch on the control console. The cable between the transformer and the AC source is the customer's responsibility.

8. **SAFETY NOTE:**


**Safety guards or enclosures are required to meet relevant safety regulations. It is the buyer's responsibility to insure that the Balancing Machine has an adequate safety protection system before operating the machine.**

---

IRD Balancing Division Offices  
[www.irdbalancing.com](http://www.irdbalancing.com)  
email: [sales@irdbalancing.com](mailto:sales@irdbalancing.com)

USA: Louisville, Kentucky 1.502.366.0916 phone 1.502.238.7851 fax
---

IRD<sup>®</sup> Balancing LLC is a limited liability company, USA.  
Standard machine configuration described, optional accessories or special order items may alter the specifications.  
Specifications in accordance with ISO 2953 abbreviated form.  
Specifications are subject to change without notice.

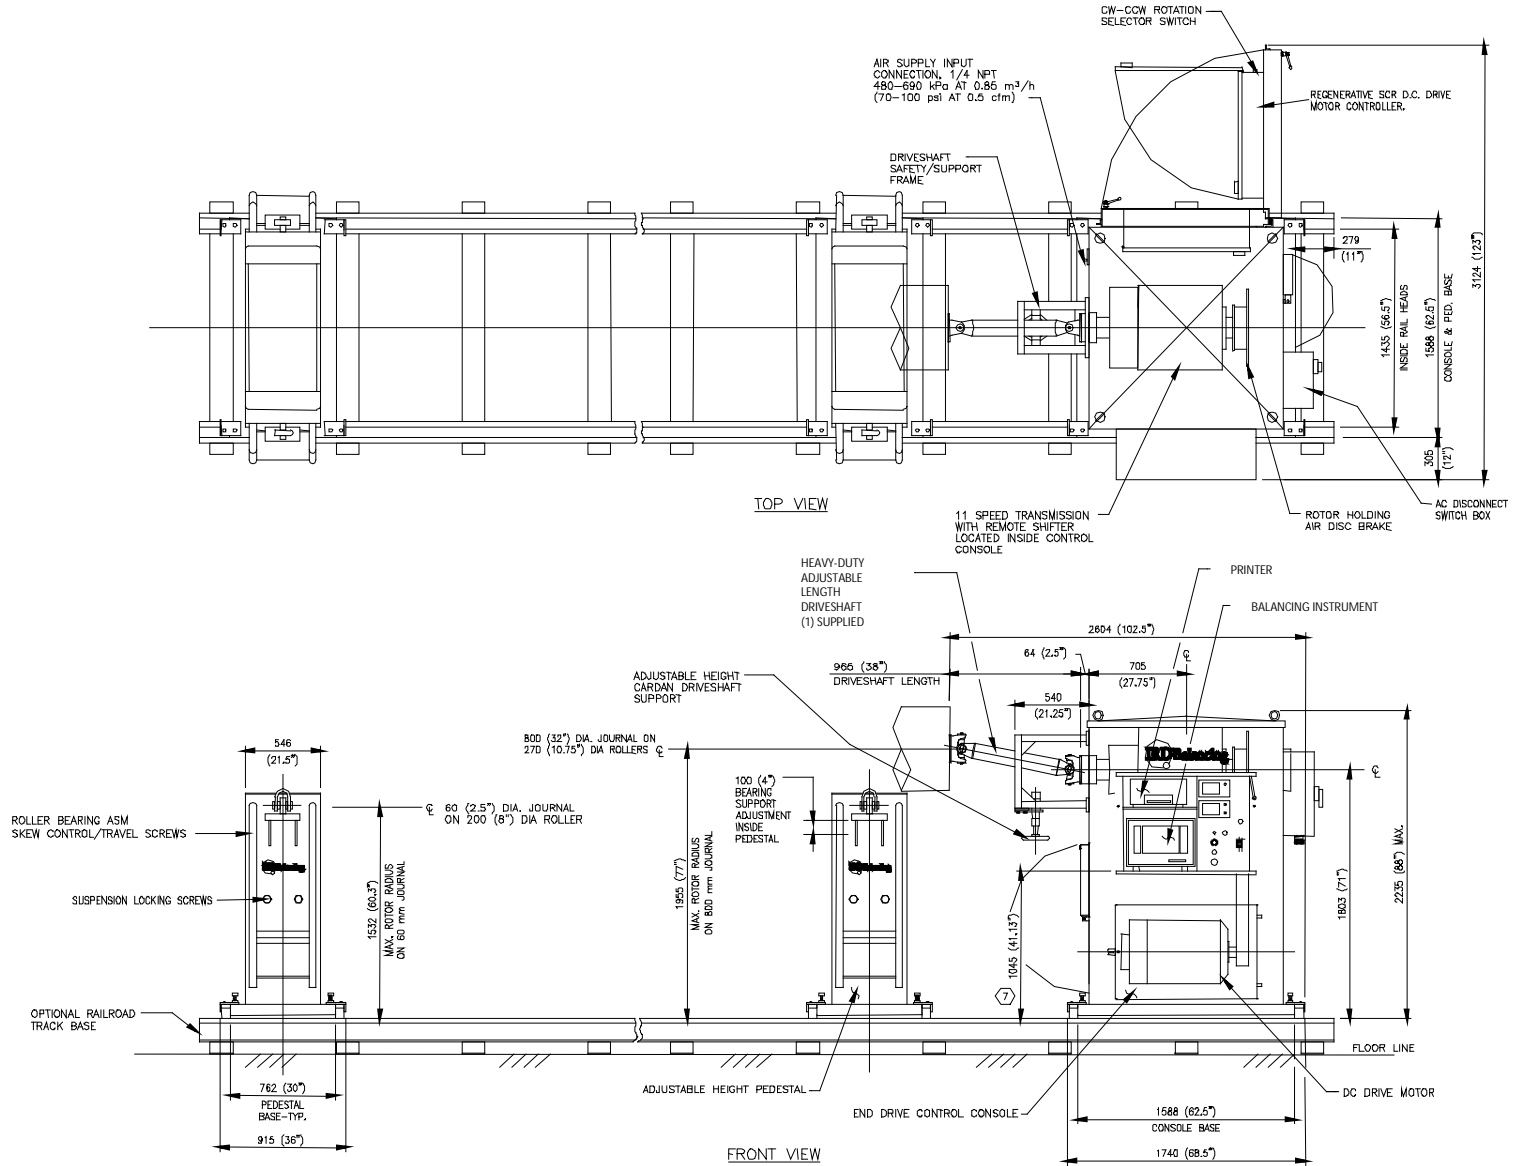

**Figure 2 - B140 Machine Layout with Optional Railroad Track Base**